

PELICAN™



PELICAN™
HARDIGG CASES™

> ISP CASE SYSTEM

> STACK WITH AUTHORITY:

THE NEW ISP CASE WITH INTER-STACKING PATTERN KEEPS LOADS TIGHT.

IF IT'S GOT TO GET THROUGH, IT'S GOT TO BE IN A PELICAN-HARDIGG™ ISP CASE

Shifting loose cargo can slow down your ops and threaten the mission with damaged freight. The new ISP Case from Pelican virtually eliminates load movement with a unique Inter-Stacking Pattern (ISP). The patent pending system is compatible across 6 different case sizes from 4 to 25 cubic feet of storage.

BUILDING THE PERFECT LOAD


The system is designed to maximize the volume of standard logistics platforms. Whether loading standard pallets, Euro pallets, JMIC containers, 463L pallets or sea containers, the ISP Case system will make the most efficient use of cargo space.

With its Inter-Stacking Pattern there is no question where the next case belongs. The disc pattern bottom mates with the wave pattern on the case below, literally falling and locking into place. Cross-stacking builds incredibly tight loads that can save time with strapping or netting. This allows taller loads that won't shift or become loose from turbulent air, high seas or dilapidated road conditions. In a word, the ISP case system is bomb-proof transport.

ONLY THE STRONG SURVIVE

Pelican is the largest manufacturer of shipping containers in the world, so we know how to do it right. The ISP Case material is a proprietary polyethylene formula that achieves the optimum balance of light weight, panel rigidity and durability. Rotational-molding provides between 15% to 20% more material in the corners and edges of the case, resulting in more strength where it is needed.

Every detail speaks to our 50 years of experience, from columnar ribs that withstand huge stacking loads to recessed hardware that "hides" from damage. Look even closer and you'll find metal reinforcements on hardware attachment points, positive anti-shear locks that keep the lid and base aligned during impact, and a tongue and groove seal with a silicone sponge O-ring to keep dust and moisture out. Even the Pressure Relief Valve is smart, allowing excess air pressure to escape and preventing vacuum lock from altitude change.



GET MOVING

Sooner or later the ISP Case has to be unloaded and hauled by hand, which is why you'll find smooth-rolling polyurethane wheels with stainless steel bearings on select cases. Extra wide Comfort Grip handles stand away from the case when in use, but are spring loaded to stay flat during shipment. The Inter-Stacking Pattern allows two or more cases to be rolled at once.

For big loads the larger ISP Cases have built-in forklift risers. And ISP cases are available with or without cushioning foam.



> ISP CASE FAMILY

IS21171103

IS29171103

IS37211103

IS45171103


IS45212303

IS45372303 (Not shown)

> JMIC CONTAINER (JOINT MODULAR INTERMODAL CONTAINER)

The JMIC is the new transportation standard of the US Military, and has been proven to increase cargo protection and load density. Measuring 52" x 44" x 43" high, the JMIC stacks in two rows to fill an ISO shipping container. The JMIC has removable panels to allow top or side loading and can be collapsed to one third the size. It is rated for up to 3,000 pounds of cargo.

Each of the six ISP Case sizes has been optimized for the JMIC container, ISP Cases are selected and filled depending on the size of the cargo, which is then loaded in the JMIC. The result is highly reduced freight damage, better organization and simplified load planning. Once at the destination, the ISP Case can be removed and rolled, or moved by forklift.

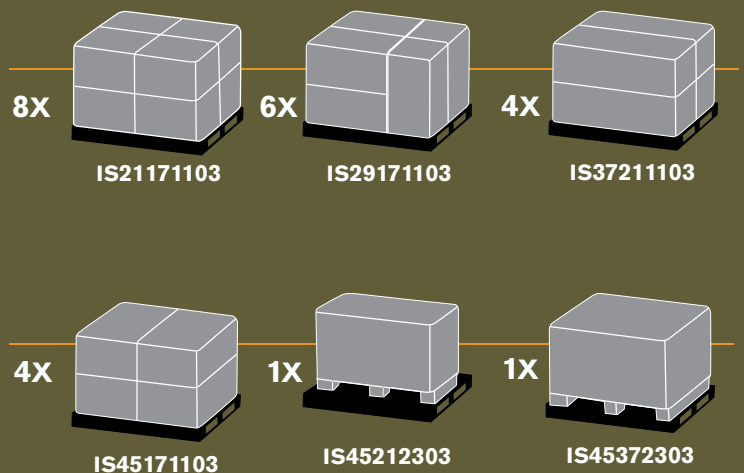




> 40" x 48" STANDARD PALLET | 1000_{MM} x 1200_{MM} EURO PALLET

Designed for both the US standard 40"x 48" pallet and the Euro 1000 mm x 1200 mm pallet, the ISP Case system can be cross-stacked to form a solid load. The use of columnar ribs in the case walls can support a much taller pallet stack than corrugated boxes. This takes advantage of overhead cargo space that would otherwise be wasted. Handles on all ISP Cases and wheels on select sizes will enhance the speed of deployment over conventional containers.

Use of deep ribs on the lid of the ISP Case provide an effective channel for strapping the case to a pallet.

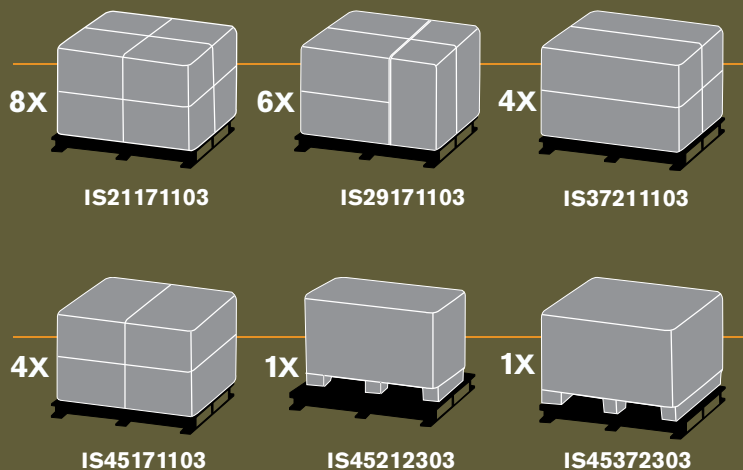




> 463L PALLET

Military logistics have long relied on the 463L pallet to move large loads to the theater of operations. However, unorganized and loose loads can threaten operations such as cargo airdrops. The ISP Case system allows all six sizes to be mixed on a 463L pallet with no wasted space. The Inter-Stacking Pattern builds a tight, stable load with minimal strapping or netting. Upper level cases, when cross-tied to the layer below, can effectively control shifting of the entire load.



Use of photos from defenseimagery.mil do not imply or constitute Department of Defense endorsement.

> SPECIFICATIONS & ACCESSORIES

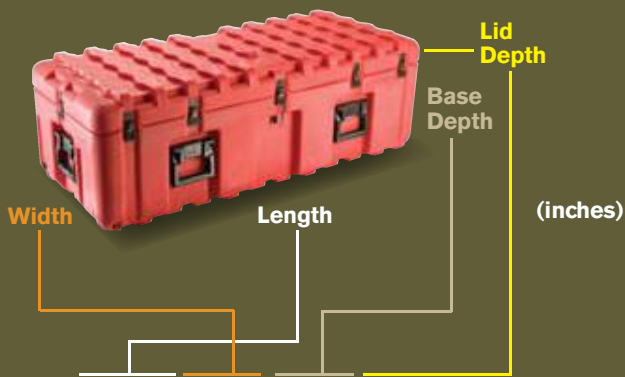

Interior size information, and product features can be found in the catalog number as shown.

IS21171103 - 00000000

Case Color
 0=Black
 1=Gray
 3=Olive Drab
 6=Red
 8=Tan

Pelican or Peli
 0=Pelican
 1=Peli





Hardware
 0=Black Cobalt
 1=Black Stainless Steel






Reserved for future use

Foam
 0=Empty
 1= Foam

Skid Runners
 0=No Skid Runners
 1=Skid Runners

Reserved for future use

			
Pressure Release Valve	Card Holder	Lockable Steel Cable Catch (2) Cobalt Finish <i>• Optional</i> Stainless Steel Black Passivated Finish	<i>• Optional</i> 2 lb. Foam 2" layers with 1" top and bottom

STANDARD COLORS			
	Gray - 133 Fed Std# 26270		Tan - 250 Fed Std# 20372
	Olive Drab - 137 Fed Std# 34096		Red - 130 Fed Std# 21105
	Black - 032 Fed Std# 27040	Note: Case colors/ options may differ slightly from printed versions.	

CAT. NO.	EXTERIOR	INTERIOR	LID DEPTH	CASE DEPTH	WEIGHT	MOBILITY
IS21171103	24.00" x 20.00" x 16.00" (60.9 x 50.8 x 40.6 cm)	21.00" x 17.00" x 14.00" (53.3 x 43.2 x 35.5 cm)	3.00" (7.6 cm)	11.00" (27.9 cm)	20 lbs. (9.07 kg)	NA
IS29171103	32.00" x 20.00" x 16.00" (81.2 x 50.8 x 40.6 cm)	29.00" x 17.00" x 14.00" (73.6 x 43.2 x 35.5 cm)	3.00" (7.6 cm)	11.00" (27.9 cm)	26 lbs. (11.79 kg)	2 Edge Casters
IS37211103	40.00" x 24.00" x 16.00" (101.6 x 60.9 x 40.6 cm)	37.00" x 21.00" x 14.00" (93.9 x 53.3 x 35.5 cm)	3.00" (7.6 cm)	11.00" (27.9 cm)	38 lbs. (17.24 kg)	2 Edge Casters
IS45171103	48.00" x 20.00" x 16.00" (121.9 x 50.8 x 40.6 cm)	45.00" x 17.00" x 14.00" (114.3 x 43.2 x 35.5 cm)	3.00" (7.6 cm)	11.00" (27.9 cm)	38 lbs. (17.24 kg)	2 Edge Casters
IS45212303	48.00" x 24.00" x 32.00" (121.9 x 60.9 x 81.2 cm)	45.00" x 21.00" x 26.00" (114.3 x 53.3 x 66 cm)	3.00" (7.6 cm)	23.00" (58.4 cm)	72 lbs. (32.66 kg)	Skid Runners
IS45372303	48.00" x 40.00" x 32.00" (121.9 x 101.6 x 81.2 cm)	45.00" x 37.00" x 26.00" (114.3 x 93.9 x 66 cm)	3.00" (7.6 cm)	23.00" (58.4 cm)	93 lbs. (42.18 kg)	Skid Runners

U.S.A.

TO ORDER PELICAN LIGHTS AND CASES IN THE USA:

TORRANCE

23215 Early Avenue
Torrance, CA 90505
Tel: 310.326.4700
800.473.5422
Fax: 310.326.3311
www.pelican.com

TO ORDER PELICAN STORM OR PELICAN HARDIGG CASES IN THE USA:

SOUTH DEERFIELD

147 North Main Street
South Deerfield, MA 01373
Tel: 800.542.7344
Fax: 413.665.8330
www.pelican.com

INDIANA

3802 N 600 W # B
Greenfield, IN 46140-9642
Tel: 317.866.2040
www.pelican.com

INTERNATIONAL

CANADA

Pelican Products, Inc.
10221-184th Street
Edmonton, Alberta
T5S 2J4 Canada
Tel: 780.481.6076
Fax: 780.481.9586
www.pelican.ca

EUROPE, MIDDLE EAST & AFRICA

Peli Products, S.L.U.
c/ Casp, 33-B Pral.
08010 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

JAPAN

Pelican Products K.K.
Nisso 22 Bldg 9F
1-11-10 Azabu Dai
Minato ward Tokyo
106-0041
Japan
Tel +81 33 585 9100
Fax +81 33 585 9109
www.pelicanproducts.jp

AUSTRALIA

Pelican Products Pty Ltd
Suite 2.33, Platinum West
4 Ilya Avenue, Erina NSW 2250
Australia
Ph: +612 4367 7022
Fax: +612 4367 7066
www.pelicanaustralia.com

CHINA

Pelican Products China Representative Office
Pine City Building, Room 1026
777 Zhaojiabang Road
Shanghai, China 200032
Tel +86.21.64189685
Fax +86.21.64189679
www.pelican.com/cn

Pelican guarantees its Roto Molded cases for 1 year against defects in materials and workmanship and 90 days on hardware from the proof of purchase. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details

